



DIN 911 (ISO 2936)

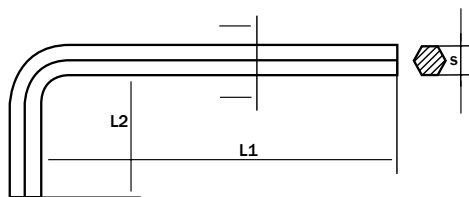

Ключ шестигранный
Материал: сталь

SW мм	L1	Длина исполнение L1	Для винта DIN912	Для винта DIN913 - 916	Для винта DIN7991	Для винта DIN7984	Длина исполнение L1	DIN 911 дюйм. размеры
1,5 2	45 50	90 110	M1,6/ M2 M2,5	M3 M4	M3	M3	65,45 65,45	1/16" 5/64" 3/32"
2,5 3 3,5	56 63 68	120 126 136	M3 M4	M5 M6	M4 M5	M4 M5	72,10 78,75 91,55	1/8" 9/64" 5/32"
4 4,5 5	71 75 80	142 150 160	M5 M6	M8 M10	M6 M8	M6 M8	104,30 117,60 117,60	3/16" 7/32" 1/4"
6 7 8	90 95 100	180 190 200	M7/M8 M10	M12/ M14 M16	M10 M12	M10 M12	143,70 169,75 208,65	9/32" 5/16" 11/32"
9 10 12	105 112 125	210 224 250	M12 M14	M18/ M20 M22/ M24	M14 M16/M18	M14/M16 M18/M20	287,35 312,95 390,65	3/8" 7/16" 1/2"
14 17 19	140 160 180	280 320 360	M16/ M18 M20/ M22 M24/ M27		M20/M22 M24	M22/M24	612,55 1.122,80 1.435,75	9/16" 5/8" 3/4"
22 24 27	200 224 250	400 448	M30 M33 M36				2.736,45 3.515,65	7/8" 1"
30 32 36	280 315 355		M42 M48					



DIN 6911

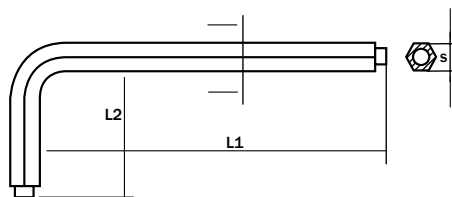

Ключ шестигранный с цапфой
Материал: сталь

SW мм	L1	L2	Для винтов DIN 6912
3	63	20	M4
4	71	25	M5
5	80	28	M6

6	90	32	M8
7	95	34	
8	100	36	M10
10	112	40	M12
12	125	45	M14
14	140	55	M16/M18
17	160	60	M20/M22
19	180	70	M24/M27
22	200	80	M30
24	224	90	M33
27	250	100	M36
32	315	125	



DIN 7603 A




Кольцо уплотнительное

Материал: медь

d1xd2xs	для наружной резьбы	для внутренней резьбы	d1xd2xs	для наружной резьбы	для внутренней резьбы
4x8x1			21x26x1,5	R1/2"	M30x2
5x9x1			21x28x1,5	R1/2"	
5,5x8x1		M10x1	22x27x1,5	M22x1,5	M30x2
6x10x1			22x29x1,5	M22x1,5	M33x2
6x12x1			23x28x2	R5/8"	
6,5x9,5x1		M12x1,5	24x29x2	M24x1,5	M33x2
6,5x11x1		M14x1,5	24x32x2	M24x1,5	M36x2
8x11,5x1	M8x1	M14x1,5	26x31x2	M26x1,5	
8x12x1	M8x1		26x32x2	M26x1,5	M36x2
8x13x1	M8x1	M16x1,5	26x34x2	M26x1,5	
8x14x1	M8x1		27x32x2	M27x2+R3/4"	M36x2
10x13,5x1		M16x1,5	28x33x2		M36x2
10x14x1	M10x1+R1/8"		30x36x2	M30x1,5+R7/8"	M39x2
10x15x1	M10x1+R1/8"	M18x1,5	30x38x2	M30x2+R7/8"	M42x2
10x16x1	M10x1		32x38x2		M42x2
12x15,5x1,5	M12x1,5	M18x1,5	33x39x2	M33x2+R1"	M42x2
12x16x1,5	M12x1,5		35x41x2		M45x2
12x17x1,5	M12x1,5	M20x1,5	36x42x2	M36x1,5	M45x2
12x18x1,5	M12x1,5		38x44x2	M38x1,5+R1 1/8	M48x2
14x18x1,5	M14x1,5+R1/4"		40x47x2		M52x2
14x20x1,5	M14x1,5+ R1/4"		42x49x2	M42x1,5+R1 1/4	M52x2
15x19x1,5		M22x1,5	45x52x2	M45x1,5	
16x20x1,5	M16x1,5		48x55x2	M48x1,5+R1 1/2	
16x22x1,5	M16x1,5		50x57x2		
17x21x1,5	R 3/8"	M24x1,5	52x60x2,5	M52x1,5	
17x23x1,5	R 3/8"	M26x1,5	60x68x2,5	M60x2+R2"	
18x22x1,5	M18x1,5	M26x1,5	64x72x2,5	M64x2	
18x24x1,5	M18x1,5	M27x2	65x74x2,5		
20x24x1,5	M20x1,5	M27x2	75x84x2,5		
20x26x1,5	M20x1,5	M30x2	90x100x2,5		

DIN 442




Крышка для укупорки закатыванием стальная. Материал: сталь



d	h	d	h
16	8	42	9
18	8	45	9
20	8	48	9
22	8	50	9
25	8	52	9
28	8	60	10
30	8	62	10
32	9	63	10
34	9	72	10
36	9	75	10
38	9	80	10
40	9	85	10

DIN 443



Крышка для укупорки вдавливанием стальная. Материал: сталь



d	h	s
8	3	0,75
10	3	0,75
12	4	1
14	5	1
16	5	1
18	6	1
20	6	1
22	7	1,6
25	8	1,6
28	9	1,6
30	9	1,6
32	10	1,6
34	10	1,6
36	11	1,6
38	12	1,6
40	12	1,6
42	13	1,6
45	14	1,6
48	15	1,6
50	15	1,6
52	16	2
56	17	2
60	18	2
63	19	2